


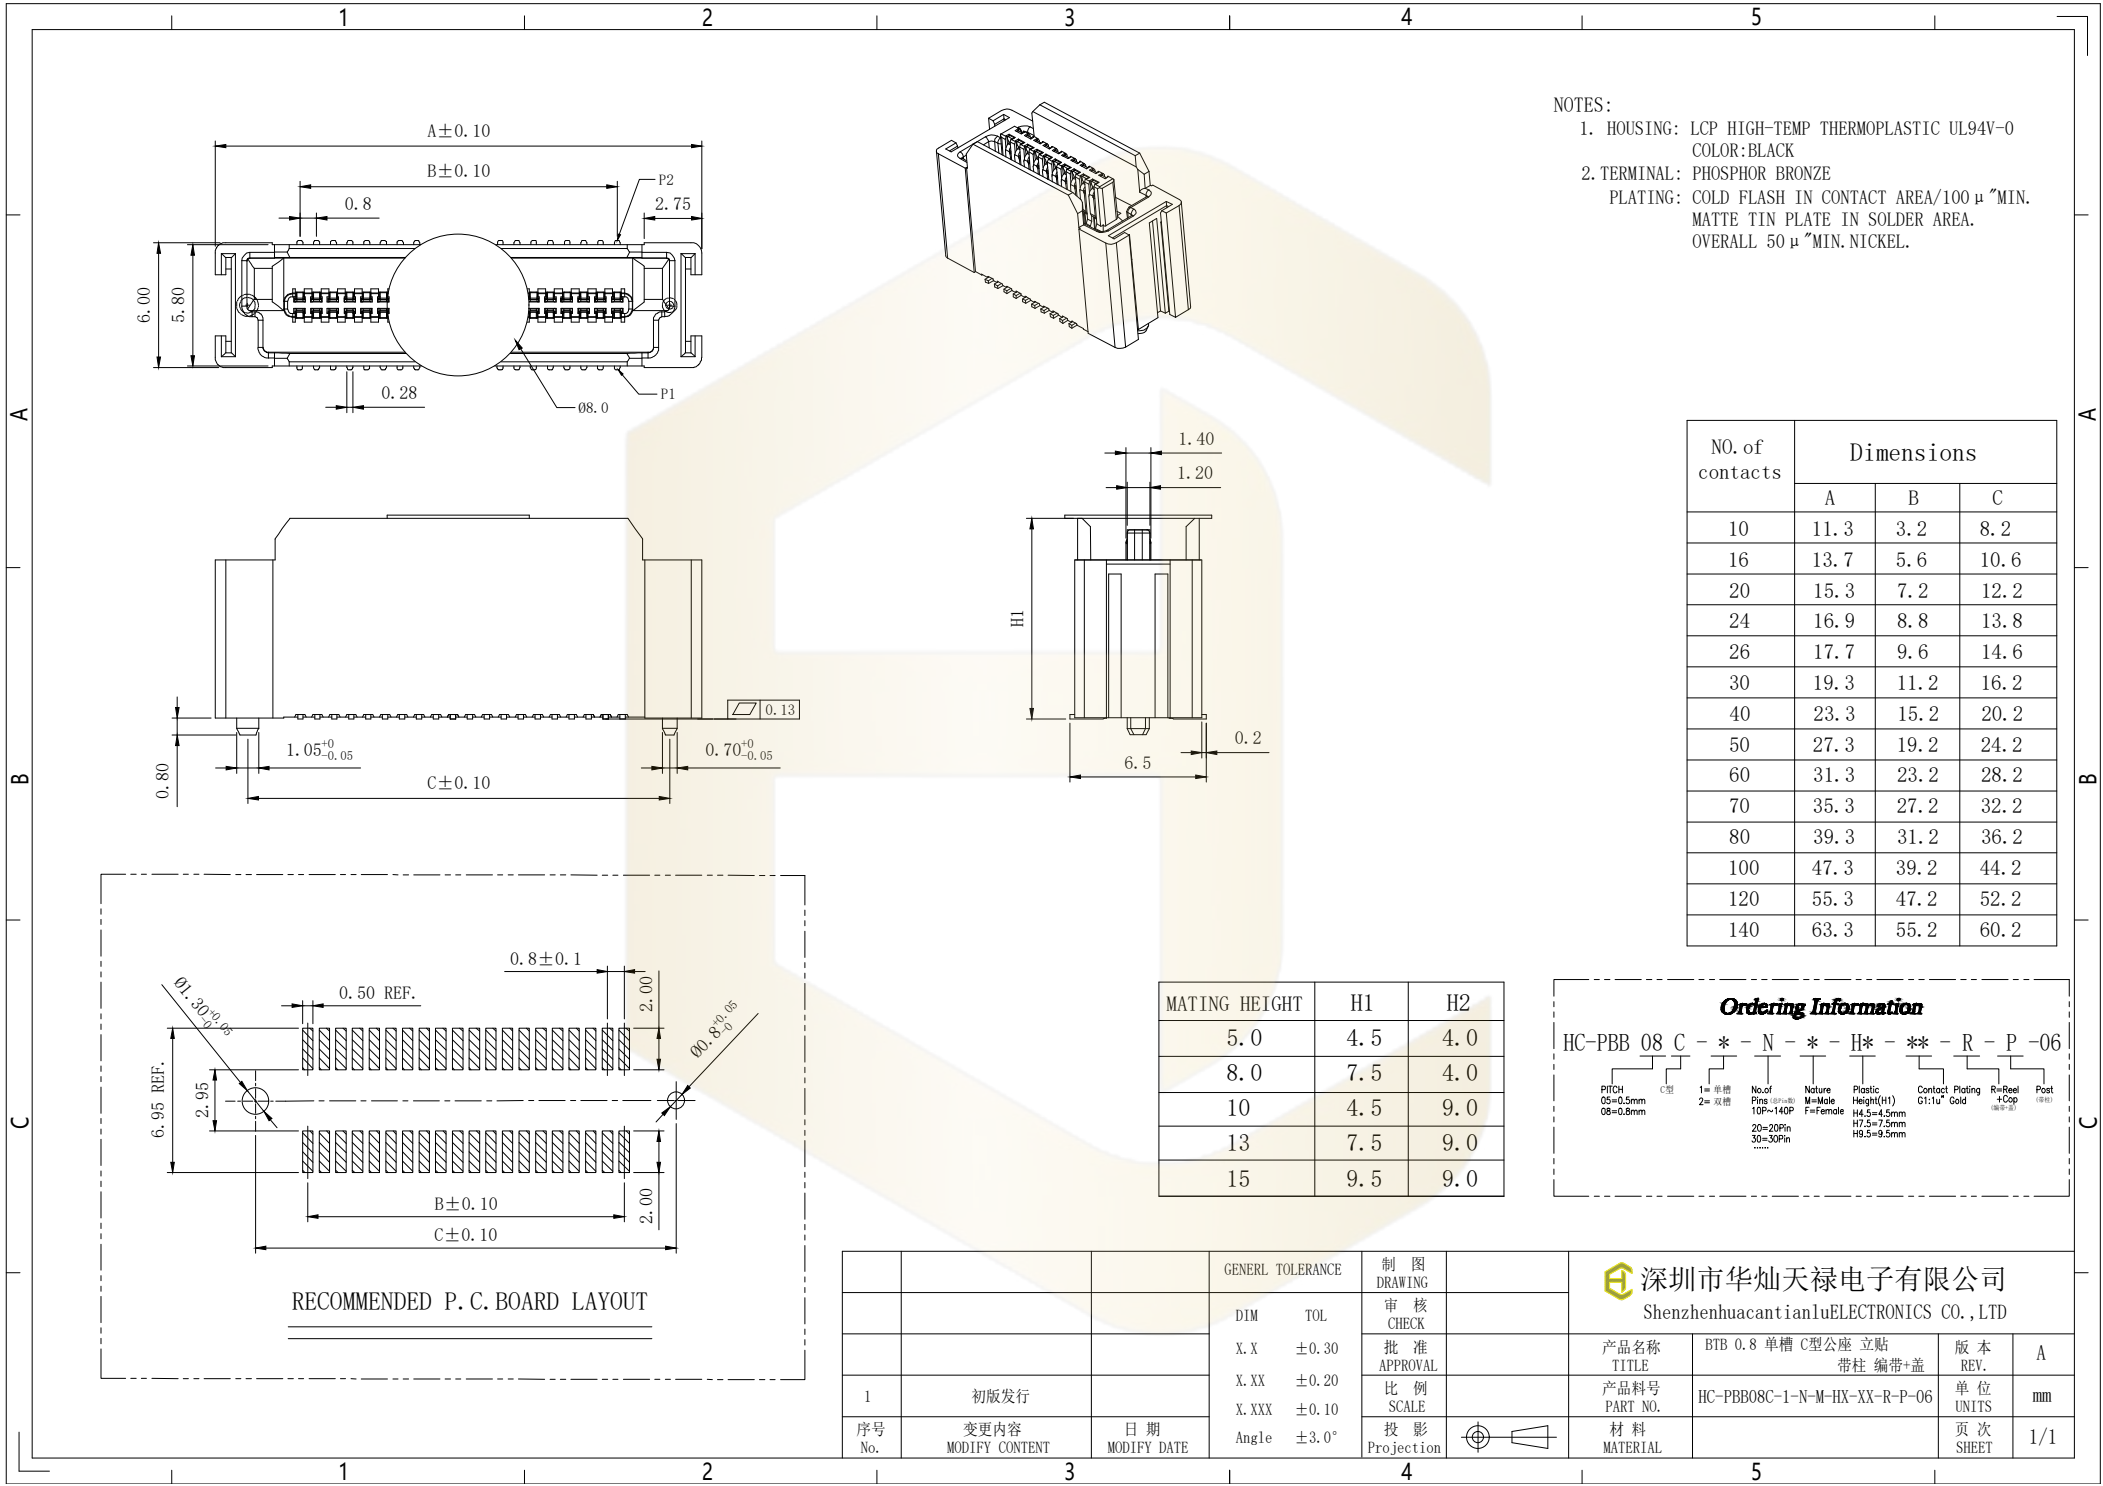

- NOTES:
- HOUSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0
COLOR:BLACK
 - TERMINAL: PHOSPHOR BRONZE
PLATING: COLD FLASH IN CONTACT AREA/100 μ "MIN.
MATTE TIN PLATE IN SOLDER AREA.
OVERALL 50 μ "MIN. NICKEL.

NO. of contacts	Dimensions		
	A	B	C
10	11.3	3.2	8.2
16	13.7	5.6	10.6
20	15.3	7.2	12.2
24	16.9	8.8	13.8
26	17.7	9.6	14.6
30	19.3	11.2	16.2
40	23.3	15.2	20.2
50	27.3	19.2	24.2
60	31.3	23.2	28.2
70	35.3	27.2	32.2
80	39.3	31.2	36.2
100	47.3	39.2	44.2
120	55.3	47.2	52.2
140	63.3	55.2	60.2

MATING HEIGHT	H1	H2
5.0	4.5	4.0
8.0	7.5	4.0
10	4.5	9.0
13	7.5	9.0
15	9.5	9.0

Ordering Information

HC-PBB 08 C - * - N - * - H* - ** - R - P -06

PITCH
05=0.5mm
08=0.8mm

C型

1= 单槽
2= 双槽

No. of Pins (P/F=8)
10P~140P
20=20Pin
30=30Pin
.....

Nature
M=Male
F=Female

Plastic Height(H1)
H4.5=4.5mm
H7.5=7.5mm
H9.5=9.5mm

Contact Plating
C1:1u" Gold

R=Reel
+Cop (080-2)

Post (080)

			GENERAL TOLERANCE	制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核				
			X.X ±0.30	批准				
			X.XX ±0.20	比例	产品名称	BTB 0.8 单槽 C型公座 立贴	版本	A
1	初版发行		X.XXX ±0.10	SCALE	产品料号	HC-PBB08C-1-N-M-HX-XX-R-P-06	单位	mm
序号	变更内容	日期	Angle ±3.0°	投影	PART NO.		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE		Projection	MATERIAL		SHEET	