
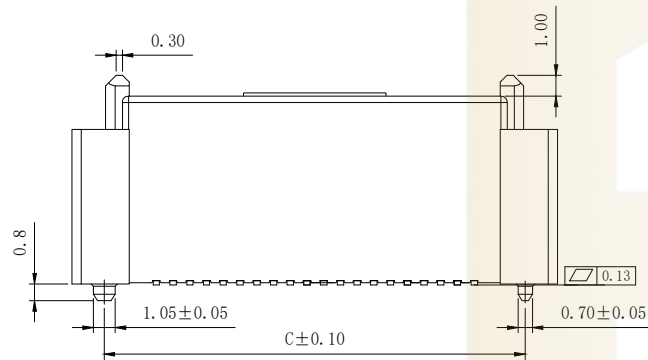
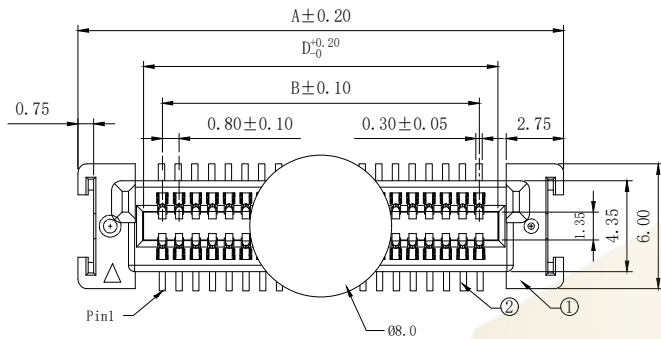


SCALE:1.25:1

NOTES:

- HOUSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0
COLOR:BLACK
- TERMINAL: PHOSPHOR BRONZE
PLATING: COLD FLASH IN CONTACT AREA/100 μ "MIN.
MATTE TIN PLATE IN SOLDER AREA.
OVERALL 50 μ "MIN. NICKEL.

No.	DESCRIPTION	MATERIAL	COLOR	REMARK
1	HOUSING	HIGH TEMP	BLACK	UL94V-0
2	TERMINAL	COPPER ALLOY	—	GOLD/TIN

NO. of contacts	Dimensions			
	A	B	C	D
10	11.3	3.2	8.2	4.9
16	13.7	5.6	10.6	7.3
20	15.3	7.2	12.2	8.9
24	16.9	8.8	13.8	10.5
26	17.7	9.6	14.6	11.3
30	19.3	11.2	16.2	12.9
40	23.3	15.2	20.2	16.9
50	27.3	19.2	24.2	20.9
60	31.3	23.2	28.2	24.9
70	35.3	27.2	32.2	28.9
80	39.3	31.2	36.2	32.9
100	47.3	39.2	44.2	40.9
120	55.3	47.2	52.2	48.9
140	63.3	55.2	60.2	56.9

Ordering Information

HC-PBB 08 C - * - N - * - H* - ** - R - P -06

PITCH
05=0.5mm
08=0.8mm

C型

1= 单槽
2= 双槽

No. of Pins (P/F=8)
10P~140P
20=20Pin
30=30Pin
.....

Nature
M=Male
F=Female

Plastic Height(H1)
H4.0=4.0mm
H5.0=5.0mm
H9.0=9.0mm

Contact Plating
C1:1u" Gold

R=Reel
+Cop
(带锡)

Post
(带脚)

MATING HEIGHT	H1	H2
5.0	4.5	4.0
8.0	7.5	4.0
10	4.5	9.0
13	7.5	9.0
15	9.5	9.0

RECOMMENDED P. C. BOARD LAYOUT

			GENREL TOLERANCE	制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核				
			X.X ±0.30	批准	产品名称	BTB 0.8 单槽 C型母座 立贴	版本	A
			X.XX ±0.20	APPROVAL	TITLE	带柱 编带+盖	REV.	
1	初版发行		X.XXX ±0.10	比例	产品料号	HC-PBB08C-1-N-F-HX-XX-R-P-06	单位	mm
序号	变更内容	日期	Angle ±3.0°	SCALE	PART NO.		UNITS	
No.	MODIFY CONTENT	MODIFY DATE		投影	材料		页次	1/1
				Projection	MATERIAL		SHEET	