
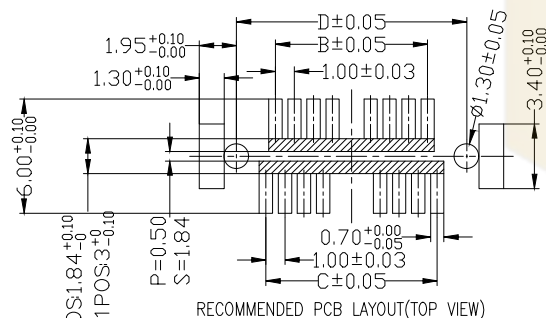

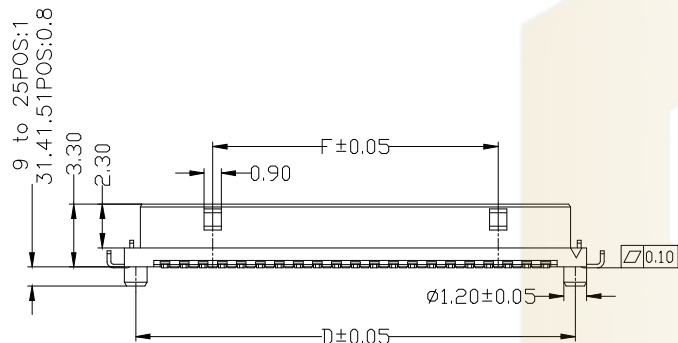


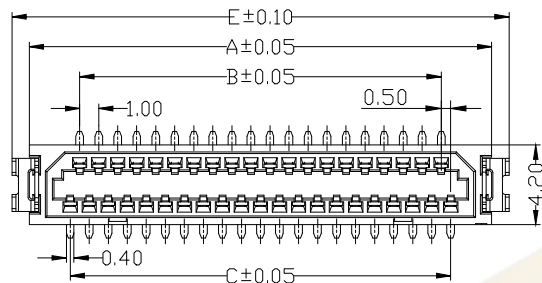

Note 1: If the pattern is included in the shaded area and not treated with resist, it could touch the connector contact.

Note 2: Please refer to each product size pattern for the universal size on the above patterns (A, B, C, D...).

Note:

Electrical

Current Rating:0.5A

Voltage Rating:150V AC

Contact Resistance:50mΩ max(Initial),75mΩ max(After)

Dielectric Withstanding Voltage:250VAC

Insulation Resistance 500mega ohms min. at 100 VDC

Physical

Housing:thermoplastic, UL 94V-0 rated,inWhite Color

Contact: Copper alloy

Operating Temperature:-45°C to +125°C

Packaging specifications: 1000 pieces per plate

	A	B	C	D	E	F
9 PIN	8.3	3	4	7.1	10.1	0
11 PIN	9.3	4	5	8.1	11.1	0
13 PIN	10.3	5	6	9.1	12.1	0
15 PIN	11.3	6	7	10.1	13.1	0
17 PIN	12.3	7	8	11.1	14.1	0
19 PIN	13.3	8	9	12.1	15.1	0
21 PIN	14.3	9	10	13.1	16.1	5
23 PIN	15.3	10	11	14.1	17.1	6
25 PIN	16.3	11	12	15.1	18.1	7
31 PIN	19.3	14	15	18.1	21.1	10
41 PIN	24.3	19	20	23.1	26.1	15
51 PIN	29.3	24	25	28.1	31.1	20

Ass'y High(H)	Plastic High	
	Male	Female
4.50	3.30	3.30

Ordering Information

HC-PBB09C - 1 - N - F - H3.3 - ** - R - P - 06

No. of Rows 1=Single Row	No. of Pins 9~51Pin 09=09Pin 11=11Pin	Nature F=Female M=Male	Plastic Height H3.3=3.3mm	Contact G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold	Plating +Cap (带帽)	R=Reel (盘装)	Post (插针)
-----------------------------	---	------------------------------	------------------------------	---	-------------------------	----------------	--------------

			GENERAL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审 核 CHECK				
			X.X	±0.30	批 准 APPROVAL	产品名称 TITLE	1.0 单槽 母座 立贴 带柱 编带+盖 (B TO B)	版 本 REV.	A
1	初版发行		X.XX	±0.20	比 例 SCALE	产品料号 PART NO.	HC-PBB09C-1-N-F-H3.3-XX-R-P-06	单位 UNITS	mm
		X.XXX	±0.10						
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1