
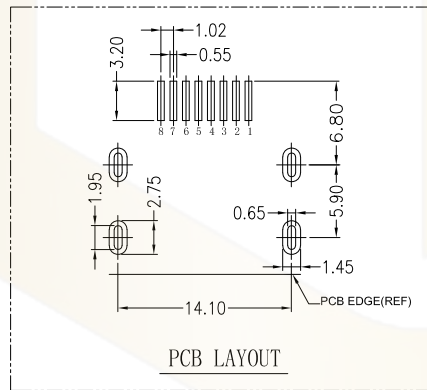
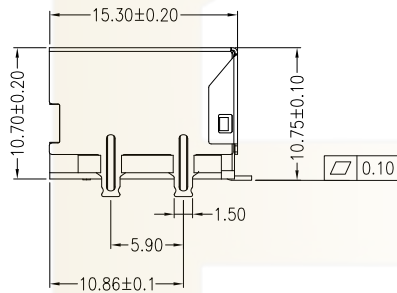
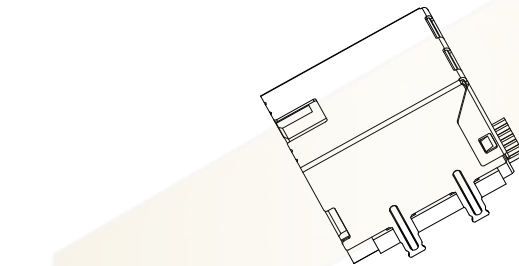






NOTE:

- MATERIAL:
 - HOUSING: THERMOPLASTIC FLAMMABILITY UL94V-0 BLACK
 - CONTACT: COPPER ALLOY (T=0.35mm)
 - SHELL: COPPER ALLOY (T=0.2mm)
- FINISH:
 - CONTACT: Gold plating in contact area, tin plating in welding area.
 - SHELL: NICKEL PLATING OVERALL

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30 MILLIOHMS MAX
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R. M. S MIN

MECHANICAL:

- DURRABILITY: 750 CYCLES MIN
- QTY/REEL: 200PCS

序号	名称	材料	表面	备注
3	外壳	黄铜	镀镍	
2	端子	C5191	焊料区镀锡， 接触区镀金(1u)	
1	基座	LCP	黑色	

Ordering Information

HC-RJ45 - *** * - * - * * * - 06

Series (系列号)	Connector Package 接口封装 S=SMT	Ports 端口数	LED/EMI Style 样式	LED Color 颜色	Type 型式	产品序号
1012 0106 0109		1: 单口 2: 双口 3: 三口 4: 四口 5: 五口 6: 六口 7: 七口	1: 无LED 2: 有LED 3: 有LED 4: 有LED 5: 有LED 6: 有LED 7: 有LED	1: 蓝色 2: 红色 3: 绿色 4: 黄色 5: 白色 6: 紫色 7: 棕色	1: 卧式 2: 立式	

			GENERAL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL					
1	初版发行		X.XX ±0.20	比 例 SCALE		产品名称 TITLE	网络插座 (卧贴 无灯无弹 15.3x10.7x15.3 无柱 带4插脚)	版 本 REV.	A
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X.XXX ±0.10	投 影 Projection		产品料号 PART NO.	HC-RJ45-0106S-1-4-T01-06	单 位 UNITS	mm
			Angle ±3.0°			材 料 MATERIAL		页 次 SHEET	1/1