
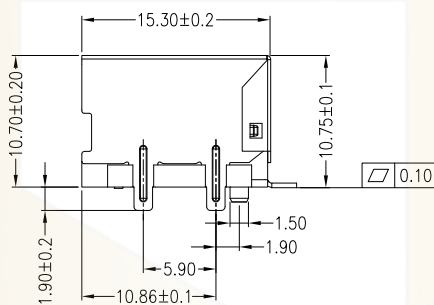

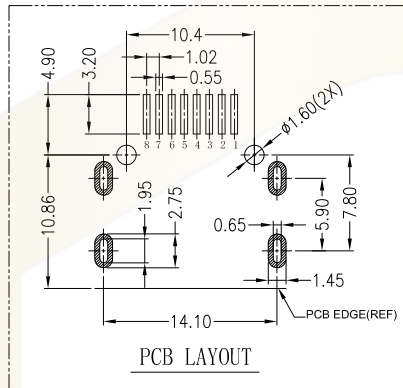




NOTE:

- MATERIAL:
 - HOUSING: THERMOPLASTIC FLAMMABILITY UL94V-0 BLACK
 - CONTACT: COPPER ALLOY (T=0.35mm)
 - SHELL: COPPER ALLOY (T=0.2mm)
- FINISH:
 - CONTACT: Gold plating in contact area, tin plating in welding area.
 - SHELL: NICKEL PLATING OVERALL

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30 MILLIOHMS MAX
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R. M. S MIN

MECHANICAL:

- DURRABILITY: 750 CYCLES MIN
- QTY/REEL: 200PCS

序号	名称	材料	表面	备注
3	外壳	黄铜	镀镍	
2	端子	C5191	焊料区镀锡, 接触区镀金(1u)	
1	基座	LCP	黑色	

Ordering Information

HC-RJ45 - *** * - * - * * * - 06

Series	Connector	Ports	LED/EMI	LED	Type	产品序号
1012 0106 0109	1012 0106 0109	1: 4芯 2: 6芯 3: 8芯	1: 无LED 2: 有LED 3: 有LED	1: 无LED 2: 有LED 3: 有LED	1: 卧式 2: 立式	

			GENERAL TOLERANCE	制图	深圳市华灿天禄电子有限公司			
			DIM TOL	审核	ShenzhenhuacantianluELECTRONICS CO., LTD			
			X.X ±0.30	批准	产品名称	网络插座 (卧贴 无灯无弹 15.3x10.7x15.3 带柱 带4插脚)	版本	A
			X.XX ±0.20	SCALE	产品料号	HC-RJ45-0106S-1-4-T02-06	单位	mm
			X.XXX ±0.10	投影	材料		页次	1/1
序号	变更内容	日期	Angle ±3.0°	Projection				
No.	MODIFY CONTENT	MODIFY DATE						