




FRONT VIEW

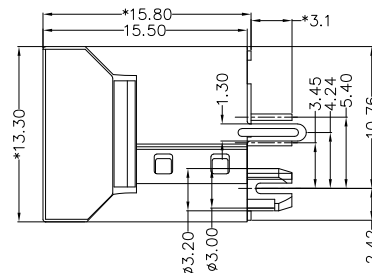

RIGHT SIDE VIEW



BOTTOM VIEW

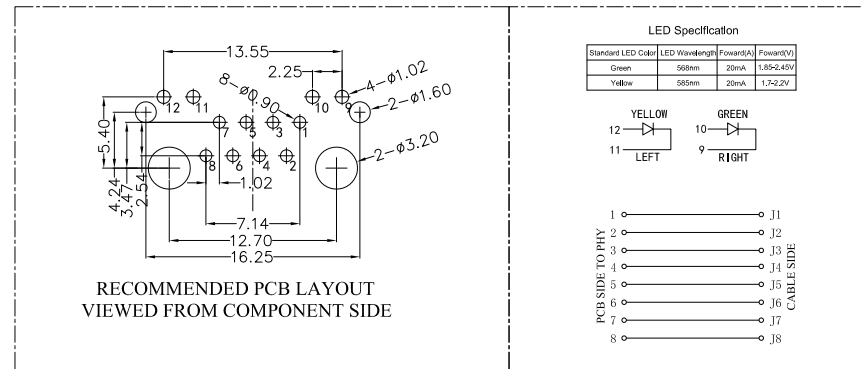

MATERIAL:

HOUSING: PBT,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$, G/FU" GOLD PLATING.

SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL


AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

Ordering Information

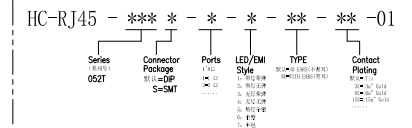

			GENERAL TOLERANCE	制 图 DRAWING	01	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK		产品名称 TITLE	网络插座 (立插 TAB-UP 带灯无弹 带耳)	版 本 REV.	A
			X. X ± 0.30	批 准 APPROVAL		产品料号 PART NO.	HC-RJ45-052T-1-2-WE-01	单 位 UNITS	mm
			X. XX ± 0.20	比 例 SCALE		材 料 MATERIAL		页 次 SHEET	1/1
			X. XXX ± 0.10	投 影 Projection					
			Angle $\pm 3.0^{\circ}$						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE							